

T-FAST® wood screw JW2-STS



Application range

- > Fastening of non-pre-drilled or pre-drilled components made of wood, wood-based material and pre-drilled and pre-set steel components to non-pre-drilled or pre-drilled components made of solid wood, solid structural timber (KVH), glued-laminated timber (BSH), laminated veneer lumber (LVL) in non-weathered areas
- > Suitable for fastening over-rafter insulation systems
- > Ideal solution for fixing rafters onto purlins


Properties

- > Carbon steel with zinc-plated surface, 5 µm plating thickness
- > Wafer head increases the pull-through capacity
- > Partial thread with end mill at the transition to the non-threaded fastener shaft reduces the installation torque and simplifies the installation process
- > Optimised thread geometry for extremely fast processing
- > Special tip geometry ensures quick gripping and enables fast processing


Cross references

Bit hexalobular TX
Cordless screwdriver ASCS 6.3
Bit holder

Applications




Technical specifications



Certifications



JW2-STS-6.0x80/48-V TX30

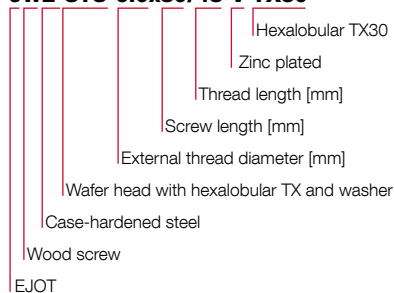

Product online



Order description	d [mm]	l [mm]	l _g [mm]	d _n [mm]	Drive	PU [pieces]	Price/100 [EUR]	Article number	EAN
d 6.0									
T-FAST JW2-ST5-6.0x80/48-V TX30	6.0	80	48	14.0	TX30	250		3820000029	4061245073941
T-FAST JW2-ST5-6.0x100/60-V TX30	6.0	100	60	14.0	TX30	250		3820000030	4061245073958
T-FAST JW2-ST5-6.0x120/70-V TX30	6.0	120	70	14.0	TX30	250		3820000031	4061245073965
T-FAST JW2-ST5-6.0x140/70-V TX30	6.0	140	70	14.0	TX30	250		3820000032	4061245073972
T-FAST JW2-ST5-6.0x160/70-V TX30	6.0	160	70	14.0	TX30	100		3820000033	4061245073989
T-FAST JW2-ST5-6.0x180/70-V TX30	6.0	180	70	14.0	TX30	100		3820000034	4061245073996
T-FAST JW2-ST5-6.0x200/70-V TX30	6.0	200	70	14.0	TX30	100		3820000035	4061245074009
T-FAST JW2-ST5-6.0x220/70-V TX30	6.0	220	70	14.0	TX30	100		3820000036	4061245074016
T-FAST JW2-ST5-6.0x240/70-V TX30	6.0	240	70	14.0	TX30	100		3820000037	4061245074023
T-FAST JW2-ST5-6.0x260/70-V TX30	6.0	260	70	14.0	TX30	100		3820000038	4061245074030
T-FAST JW2-ST5-6.0x280/70-V TX30	6.0	280	70	14.0	TX30	100		3820000039	4061245074047
T-FAST JW2-ST5-6.0x300/70-V TX30	6.0	300	70	14.0	TX30	100		3820000040	4061245074054
d 8.0									
T-FAST JW2-ST5-8.0x80/48-V TX40	8.0	80	48	21.0	TX40	100		3820000041	4061245074115
T-FAST JW2-ST5-8.0x100/60-V TX40	8.0	100	60	21.0	TX40	100		3820000042	4061245070810
T-FAST JW2-ST5-8.0x120/80-V TX40	8.0	120	80	21.0	TX40	100		3820000043	4061245071619
T-FAST JW2-ST5-8.0x140/80-V TX40	8.0	140	80	21.0	TX40	100		3820000044	4061245070858
T-FAST JW2-ST5-8.0x160/80-V TX40	8.0	160	80	21.0	TX40	50		3820000045	4061245070865
T-FAST JW2-ST5-8.0x180/80-V TX40	8.0	180	80	21.0	TX40	50		3820000046	4061245070889
T-FAST JW2-ST5-8.0x200/80-V TX40	8.0	200	80	21.0	TX40	50		3820000047	4061245070896
T-FAST JW2-ST5-8.0x220/80-V TX40	8.0	220	80	21.0	TX40	50		3820000048	4061245071008
T-FAST JW2-ST5-8.0x240/80-V TX40	8.0	240	80	21.0	TX40	50		3820000049	4061245071015
T-FAST JW2-ST5-8.0x260/80-V TX40	8.0	260	80	21.0	TX40	50		3820000050	4061245071022
T-FAST JW2-ST5-8.0x280/80-V TX40	8.0	280	80	21.0	TX40	50		3820000051	4061245071039
T-FAST JW2-ST5-8.0x300/80-V TX40	8.0	300	80	21.0	TX40	50		3820000052	4061245071046
T-FAST JW2-ST5-8.0x320/80-V TX40	8.0	320	80	21.0	TX40	50		3820000053	4061245071053
T-FAST JW2-ST5-8.0x340/80-V TX40	8.0	340	80	21.0	TX40	50		3820000054	4061245074061
T-FAST JW2-ST5-8.0x360/80-V TX40	8.0	360	80	21.0	TX40	50		3820000055	4061245074078
T-FAST JW2-ST5-8.0x380/80-V TX40	8.0	380	80	21.0	TX40	50		3820000056	4061245074085
T-FAST JW2-ST5-8.0x400/80-V TX40	8.0	400	80	21.0	TX40	50		3820000057	4061245074092